


WX VAPOR COMM 2.5

CHANGEABLE

MIL-PRF-32432A STANAG 2920/4296 ANSI Z.87 EN166F

The WX VAPOR COMM infuses its lightweight frame with an aggressive design and an outstanding field of view, in a unique, bold look, packed with versatility. The flexible frame design guarantees a fit on all head shapes, and the rubberized Twist Lock nosepiece ensures a superior grip during almost any activity. The COMM temples offers a comfortable fit, when wearing earmuffs and other ear mounted communication devices, ulti-

mately making them almost unnoticeable, keeping you focused all day long. Available in both two- and three-lens kits, you have the power to change the lenses as needed for your lighting conditions and environment. Designed with style and comfort in mind, the WX VAPOR is here to keep you safe from unexpected impacts.

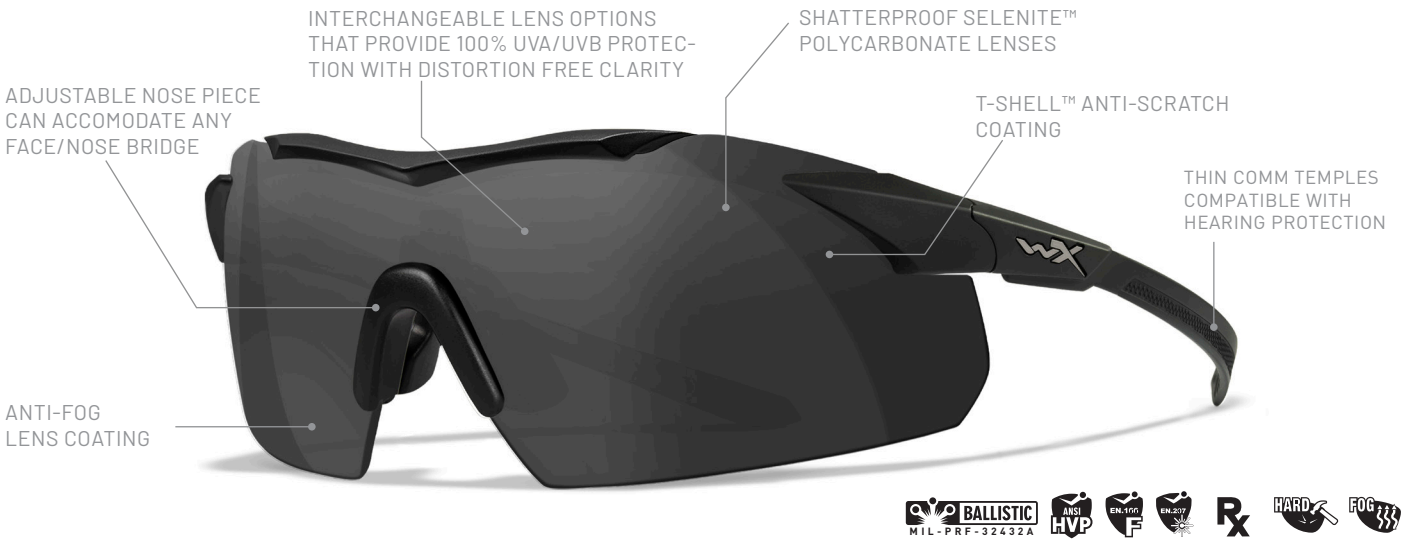

STANDARD LENSES				*LIGHT TRANSMISSION VARIES +/- 3% DEPENDING ON MODEL	
	GREY	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 15%*	COATING: HARD COATING, ANTI FOG
	POLARIZED GREY	SELENITE™ POLYCARBONATE	WEIGHT: 18 GRAM	LT: 15%*	COATING: HARD COATING, ANTI REFLECTIVE, OLEOPHOBIC
	CLEAR	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 89%*	COATING: HARD COATING, ANTI FOG
	LIGHT RUST	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 52%*	COATING: HARD COATING, ANTI FOG
	YELLOW	SELENITE™ POLYCARBONATE	WEIGHT: 17 GRAM	LT: 82%*	COATING: HARD COATING, ANTI FOG

FRAMES				HEAD SIZE: SMALL TO 2-XLARGE // FRAME SIZE: 44 / 24 / 135	
	MATTE BLACK	TEMPLES: COMM	TRILOID™ NYLON	WEIGHT: 17 GRAM	
	MATTE TAN	TEMPLES: COMM	TRILOID™ NYLON	WEIGHT: 17 GRAM	

VERSION: 2024.01

LASER EYE PROTECTION LENSES

	RED TINT	SELENITE™ POLYCARBONATE	OD 2+ AT 405 NM OD 5+ AT 532 NM	IVPT: 38% IVST: 27%	LT: 49%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG
	BLUE TINT	SELENITE™ POLYCARBONATE	OD 2+ AT 405 NM OD 2+ AT 635 NM OD 3+ AT 640 NM OD 4+ AT 650 NM OD 3+ AT 660 NM	IVPT: 47% IVST: 75%	LT: 36%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG
	GREEN TINT	SELENITE™ POLYCARBONATE	OD 3+ AT 405 NM OD 1+ AT 450 NM OD 2+ AT 785 NM OD 6+ AT 808 NM OD 7+ AT 820 NM OD 6+ AT 830 NM OD 6+ AT 1064NM	IVPT: 38% IVST: 26%	LT: 39%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG
	LIGHT GREY TINT	SELENITE™ POLYCARBONATE	OD 6+ AT 1064 NM	IVPT: 55% IVST: 53%	LT: 55%	WEIGHT: 18 GRAM	COATING: HARD COATING, ANTI FOG


PACKAGES

3552	FRAME: MATTE BLACK	LENSES: GREY + CLEAR + LIGHT RUST	NSN 4240-22-629-0769
3562	FRAME: MATTE TAN	LENSES: GREY + CLEAR + LIGHT RUST	NSN 4240-22-629-0776

PRESCRIPTION CARRIER

SOLD SEPARATELY


Insert a prescription carrier into the eyewear for corrected vision behind high impact protection.

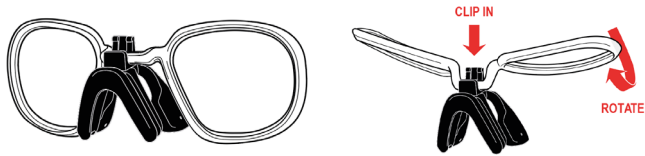

WEIGHT (WITHOUT PRESCRIPTION LENSES): 2 GRAM

TWIST LOCK ADJUSTABLE NOSEPIECE

Designed to provide an universal fit and slip-free comfort.

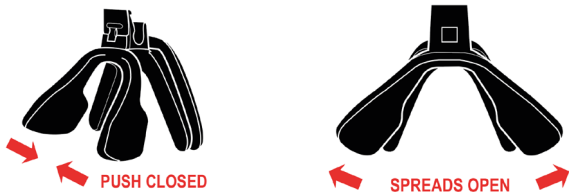

COMM TEMPLES

COMM temples are thin enough to fit under shooting earmuffs, and other ear mounted communication devices providing a comfortable fit.

VAPOR STANDARD TEMPLES 3,5 MM

VAPOR COMM TEMPLES 1,75 MM



IMPACT PERFORMANCE

Founded on supplying military forces and law enforcement personnel with top-of-the-line ballistic eyewear, Wiley X continues to hold safety as our priority, making sure to meet international expectations and accredited test standards. This model passes the following tests:

VELOCITY

MIL-PRF-32432A
SPECTACLE STANDARD

768-796 KM/H

ANSI SPECTACLE
STANDARD

165 KM/H

EN 166F SPECTACLE
STANDARD

162 KM/H

INCLUDED ACCESSORIES

TS-235M

SEMI HARD CASE WITH MOLLE STRAP



A427

CLEANING CLOTH



A492

LEASH CORD WITH RUBBER TIPS